

INT 20 + ATVE

Origin - Provenienza : C.E.E.



STRUCTURE

SEAT

Ergonomic inner seat in fibreglass reinforced polyamide equipped with internal metal bars. Covering shell in injected polypropylene (30/10 thickness) hooked to the support by means of clips and screws.

BACKREST

Support in fibreglass reinforced nylon.

PADDING

SEAT

In cold injected Polyurethane, CFC free, 45 mm thickness.

UPHOLSTERY

SEAT

Simil-Leather/Fabric stitched and mounted without glues

BACKREST

High resistance 100% polyester elastic mesh.

CONNECTION

Seat/backrest through a structure in fibreglass reinforced nylon, 7 mm thickness.

MECHANISM DYNAMIC SYNCHRON

EPN Synchron mechanism lockable in 5 positions with anti-shock system and body weight tension adjustment by means of an easy-to-use side knob.

SEAT HEIGHT ADJUSTMENT

Through a class 3 gas lift with 130 mm stroke, complying with DIN 4550/4551 standards.

SEAT DEPTH ADJUSTMENT

Through a button with forward seat movement, 50 mm stroke.

LUMBAR SUPPORT ADJUSTMENT (optional)

Manually 80 mm stroke lockable in all positions.

HEADREST

Height and width adjustable, reclining polypropylene structure. Upholstered in fabric or leather.

ARM-RESTS (optional)

BR4P Height adjustable arm-rests (100 mm stroke), swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad, width adjustable through a handle, 30 mm stroke on each side. Elbow support in soft polyurethane. **4D**
BR2P Nylon arm-rests, upper pad in soft polyurethane. Height adjustable with 100 mm stroke, width adjustable through a handle, 30 mm stroke on each side. **2D**

BR35 Steel support, arm-rests swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad with 50 mm stroke. Height adjustable with manual system, 70 mm stroke.

Upper part in soft polyurethane. Arm-rest fixing by means of screws. Elbow support in soft polyurethane. **3D**

BR14 Nylon arm-rests swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad with 50 mm stroke. Height adjustable with manual system, 70 mm stroke.

Upper part in soft polyurethane. Arm-rest fixing by means of screws. **4D**



INT 20 + ATVE


Origin -Provenienza : C.E.E.

BASE

5-star base in nylon (fibreglass reinforced), Ø700 mm.
OPTIONAL : 5-star base in brushed aluminium (with chromium plated effect) Ø 700 mm.

CASTORS

Polypropylene self-braking double castors, complying with EN1335-2 standard, preventing any accidental movement of the chair, Ø 65mm.
OPTIONAL : black soft castors with grey rubber

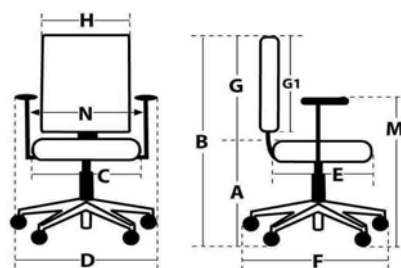

DIMENSIONS - INGOMBRI

A	Seat height	Mini	420 mm
		Maxi	550 mm
B	Total height	Mini	1220 mm
		Maxi	1350 mm
C	Seat width		490 mm
D	Max total width		680 mm
E	Seat depth		500 mm
F	Total depth		680 mm
G	Backrest height		600 mm
G1	Backrest lumbar height adjustment		100 mm
H	Backrest width		490 mm
	Seat depth adjustment		50 mm
M	Arm-rest height adjustment I	Mini	610 mm
		Maxi	670 mm



WEIGHT

Without armrests	14,10 Kg
With armrests	16,30 Kg

VOLUME

Without armrests	0,19 m3
With armrests	0,24 m3

Packaging 1 units per box