

## INT 20

Origin - Provenienza : C.E.E.



### STRUCTURE

#### SEAT

Ergonomic inner seat in fibreglass reinforced polyamide equipped with internal metal bars. Covering shell in injected polypropylene (30/10 thickness) hooked to the support by means of clips and screws.

#### BACKREST

Support in fibreglass reinforced nylon.

### PADDING

#### SEAT

In cold injected Polyurethane, CFC free, 45 mm thickness.

### UPHOLSTERY

#### SEAT

Simil-Leather/Fabric stitched and mounted without glues

#### BACKREST

High resistance 100% polyester elastic mesh.

### CONNECTION

Seat/backrest through a structure in fibreglass reinforced nylon, 7 mm thickness.

### MECHANISM DYNAMIC SYNCHRON

**EPN** Synchron mechanism lockable in 5 positions with anti-shock system and body weight tension adjustment by means of an easy-to-use side knob.

### SEAT HEIGHT ADJUSTMENT

Through a class 3 gas lift with 130 mm stroke, complying with DIN 4550/4551 standards.

### SEAT DEPTH ADJUSTMENT

Through a button with forward seat movement, 50 mm stroke.

### LUMBAR SUPPORT ADJUSTMENT ( optional )

Manually 80 mm stroke lockable in all positions.

### ARM-RESTS ( optional )

**BR4P** Height adjustable arm-rests (100 mm stroke), swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad, width adjustable through a handle, 30 mm stroke on each side. Elbow support in soft polyurethane. **4D** **BR2P** Nylon arm-rests, upper pad in soft polyurethane. Height adjustable with 100 mm stroke, width adjustable through a handle, 30 mm stroke on each side. **2D**

**BR35** Steel support, arm-rests swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad with 50 mm stroke. Height adjustable with manual system, 70 mm stroke.

Upper part in soft polyurethane. Arm-rest fixing by means of screws. Elbow support in soft polyurethane. **3D**

**BR14** Nylon arm-rests swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad with 50 mm stroke. Height adjustable with manual system, 70 mm stroke.

Upper part in soft polyurethane. Arm-rest fixing by means of screws. **4D**



## INT 20


Origin -Provenienza : C.E.E.

### BASE

5-star base in nylon (fibreglass reinforced), Ø700 mm.  
OPTIONAL : 5-star base in brushed aluminium (with chromium plated effect) Ø 700 mm.

### CASTORS

Polypropylene self-braking double castors, complying with EN1335-2 standard, preventing any accidental movement of the chair, Ø 65mm.  
OPTIONAL : black soft castors with grey rubber

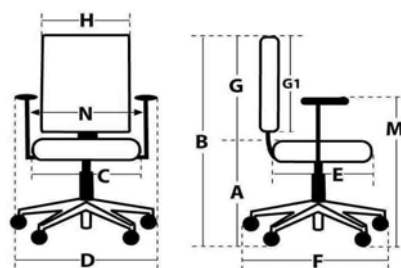

### DIMENSIONS - INGOMBRI

A	Seat height	Mini	420 mm
		Maxi	550 mm
B	Total height	Mini	1020 mm
		Maxi	1150 mm
C	Seat width		490 mm
D	Max total width		680 mm
E	Seat depth		500 mm
F	Total depth		680 mm
G	Backrest height		600 mm
G1	Backrest lumbar height adjustment		100 mm
H	Backrest width		490 mm
	Seat depth adjustment		50 mm
M	Arm-rest height adjustment I	Mini	610 mm
		Maxi	670 mm



### WEIGHT

Without armrests	13,50 Kg
With armrests	15,70 Kg

### VOLUME

Without armrests	0,19 m3
With armrests	0,24 m3

Packaging 1 units per box