

TE 19

Origin - Provenienza : C.E.E.



STRUCTURE

SEAT

Anatomical, 5 mm thickness support in fibreglass reinforced nylon equipped with internal metal bars.

Covering shell in injected polypropylene (30/10 thickness) hooked to the support by means of clips and screws.

BACKREST

Support in fibreglass reinforced nylon.

PADDING

SEAT

In cold injected Polyurethane, CFC free, 55 Kg/m³ density, 50 mm thickness.

UPHOLSTERY

SEAT

Leather/Fabric stitched and mounted without glues

BACKREST

High resistance 30% PES mesh + 70% PVC, pressed inside the supporting structure.

CONNECTION

Seat/backrest through a structure in fibreglass reinforced nylon, 25 mm thickness.

MECHANISM DYNAMIC SYNCHRON

E-REX synchro mechanism, lockable in 5 positions, with anti-shock system and body weight tension adjustment.

SEAT HEIGHT ADJUSTMENT

Through a class 3 gas lift with 130 mm stroke, complying with DIN 4550/4551 standards.

SEAT DEPTH ADJUSTMENT (optional)

Through a button with forward seat movement, 50 mm stroke.

BACKREST HEIGHT ADJUSTMENT

Automatic rack-and-pinion adjustment inside the backrest blade, up&down system. Adjustable in 6 positions with 65 mm stroke.

LUMBAR SUPPORT ADJUSTMENT (optional)

Manually by turning the 2 levers behind the lumbar support.

HEADREST (optional)

Height and width adjustable, reclining polypropylene structure. Upholstered in fabric or leather.

ARM-RESTS (optional)

BR5C / BR4P Height adjustable arm-rests (100 mm stroke), swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad, width adjustable through a handle, 30 mm stroke on each side. Elbow support in soft polyurethane.
BRP2P Height adjustable arm-rests with 100 mm stroke, width adjustable through a handle, 30 mm stroke on each side. Elbow support in soft polyurethane.

BR14 Nylon arm-rests swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad with 50 mm stroke. Height adjustable with manual system, 70 mm stroke. Upper part in soft polyurethane. Arm-rest fixing by means of screws.

BR35 Height adjustable arm-rests (60 mm stroke), swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad. Elbow support in soft polyurethane.

TE 19


Origin -Provenienza : C.E.E.

BASE

5-star base in (fibreglass reinforced) nylon, Ø 700 mm.
OPTIONAL : 5-star base in brushed aluminium
(with chromium plated effect) Ø 700 mm.

CASTORS

Polypropylene self-braking double castors, complying with
EN1335-2 standard, preventing any accidental movement of
the chair, Ø 65 mm.
OPTIONAL : black soft castors with grey rubber Ø 65 mm.

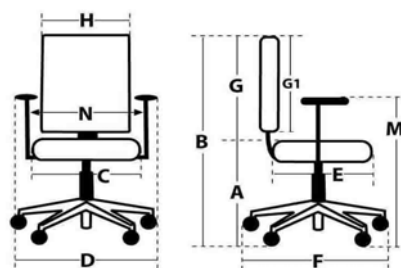

DIMENSIONS - INGOMBRI

A	Seat height	Mini	420 mm
		Maxi	550 mm
B	Total height	Mini	1010 mm
		Maxi	1140 mm
C	Seat width		500 mm
D	Max total width		680 mm
E	Seat depth		450 mm
F	Total depth		680 mm
G	Backrest height		600 mm
G1	Backrest lumbar height adjustment		60 mm
H	Backrest width		480 mm
	Seat depth adjustment		50 mm
M	Arm-rest height adjustment I	Mini	600 mm
		Maxi	660 mm



WEIGHT

Without armrests	13,30 Kg
With armrests	15,50 Kg

VOLUME

Without armrests	0,19 m3
With armrests	0,24 m3

Packaging 1 units per box