

n.f.t. folding table



# Inspiringly Simple.


# Simply Inspired.




Reduced design combined with a logical technology concept – this is what makes *n.f.t.* a congenial partner for event, seminar or meeting rooms. Amazingly multi-talented, with a wide range of finishes, maximum leg room, sitting at the ends, and convenient operation. Options: linking, electrification and modesty panel.

The hinge mechanism is discreetly hidden from view. Its functions are concealed and at the same time simple, intuitive and safe to handle. Integrated protection ensures that the baseframe is not damaged by stacking.

Design: greutmann bolzern

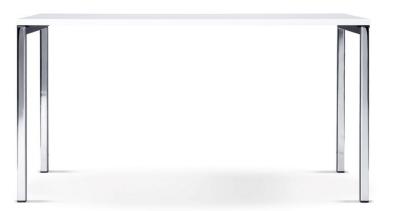

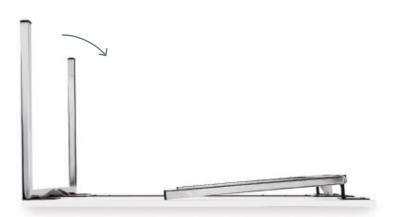

# Rich in Detail.

# Optional.























Folding table 4-leg base Folding table 4-leg base Corner slot-in leaf


Cross linking:











Wheelchair clearance as per Austrian standard ÖNORM B 1602.

### Standard features:

### Table tops:

standard laminate or HPL with ABS-edge resp. veneered with laminated wood edge. Black reinforcement plinth for table length 1400 mm and longer. Optional: light weight top HPL with ABS edge resp. veneered with laminated wood edge, white reinforcement plinth. Weight reduction in case of light weight top up to 7.5 kg depending on dimension. ABS edge with moisture resistant PU glueing. Stained wood surfaces. Half-round table with preparation for linking. Note: preparation for fixed linking required for rectangular tables.

### Corner slot-in leave:

finish same as table tops, but includes 4 pcs. of permanent linking devices. Note: preparation for lateral fixed linking required for tables.

#### Frame

Leg cross-section: 35/35 mm, adjustable plastic glides, integrated stacking protection. Folding mechanism: folding fittings with locking device, fold-out protection. Black plastic parts made of extremely solid thermoset. Tables with the length of 1200 mm and 1300 mm have a higher stacking ledge and the frame is moved to the inner side.

## Modesty panel height 350 mm (optional):

perforated sheet steel, detachable without tools. Tables with mounted modesty panel are not stackable.

## Linking device for rectangular folding tables 3920 (optional):

**Quick linking device lateral 9130-000** (for table length 1400 mm and longer): for lateral linking rectangular table-rectangular table. Plastic, clipon method.

Lateral fixed linking device 9131-000: for lateral linking rectangular table-rectangular table. Sheet steel, black, permanently mounted. Preparation for lateral fixed linking is required. In case of linking 2 linking devices are necessary per table side.

## Linking device for half-round folding table 3921 (optional):

Lateral fixed linking device 9134-000: for linking half-round table-rectangular table (lateral). Sheet steel, black, incl. 2 hand wheels. Note: preparation for lateral fixed linking required for rectangular tables

Cross fixed linking device 9135-000: for linking half-round table-half-round table or half-round table-rectangular table (crosswise). Sheet steel, black, incl. 2 hand wheels. Note: preparation for cross fixed linking required for rectangular tables. In case of linking 2 linking devices are necessary per table side.

### **Electric cabling** (optional):

**Rectangular cable box:** metal, powdercoated, with flap; removable without tools. Tables with mounted cable box are not stackable.



# Perfect Partners.



update



outline



nooi

A-4950 Altheim Linzer Strasse 22 T +43 (7723) 460-0 altheim@wiesner-hager.com

D-97080 Würzburg Schürerstrasse 3 T +49 (931) 3 55 85-0 F +49 (931) 3 55 85 85 wuerzburg@wiesner-hager.com

NL-6101 XB Echt Nobelweg 17 T +31 (475) 41 02 22 benelux@wiesner-hager.com

F-67201 Eckbolsheim 13, rue Ettore Bugatti T +33 (3) 88 59 90 90 F +33 (3) 88 59 90 89 france@wiesner-hager.com

UK: Wiesner-Hager Ltd. Fourth Floor 104-110 Goswell Road London EC1V 7DH T +44 (20) 7490 3627 london@wiesner-hager.com

CZ-150 00 Praha 5 Drtinova 557/10 T +420 271 730 444 praha@wiesner-hager.com

Certified acc. to: ISO 9001, ISO 14001 and ISO 14025

