

## C40 + ATTP

Origin - Provenienza : C.E.E.



### STRUCTURE

#### SEAT

Ribbed support in fibreglass reinforced nylon.  
Internal shell in injected polypropylene (30/10 thickness).

#### BACKREST

Ø 15 mm high resistance steel support covered in soft polyurethane.

### PADDING

#### SEAT

In cold injected Polyurethane, CFC free, 55kg/m3 density,  
60 mm thickness.

### UPHOLSTERY

#### SEAT

Simil-Leather/Fabric stitched and mounted without glues

#### BACKREST

High resistance 100% polyester elastic mesh with nylon seams,  
Leather/Pelle Rigenarata/ Fabric stitched to the foam rubber.  
Completely upholstered backrest.

### CONNECTION

Seat/backrest through a soft polyurethane covered structure in  
high resistance steel

### MECHANISM SYNCHRON

**BK-REX** Wide opening synchronized up-and-over system  
ensuring very high levels of comfort and ergonomics.

### ERGONOMICS

Easy-to-use 3 locking position system with backrest anti-shock  
system, body weight tension adjustment from 45 kg to 120 kg  
and side adjustment system.

### SEAT HEIGHT ADJUSTMENT

Through a class 4 gas lift with 135 mm stroke, complying with  
DIN 4550/4551 standards.

### LUMBAR SUPPORT ADJUSTMENT ( optional )

Manually through a 80 mm stroke knob lockable in all positions.

### SEAT DEPTH ADJUSTMENT

Through a button with forward seat movement, 50 mm stroke.

### HEADREST

Height and width adjustable, reclining polypropylene structure.  
Upholstered in Leather/fabric stitched.

### ARM-RESTS ( optional )

BR5C / BR5N/ BR4P Height adjustable arm-rests (100 mm stroke),  
swivelling to the right and left by 30 degrees, forward and  
backward adjustable upper pad, width adjustable through  
a handle, 30 mm stroke on each side.

Elbow support in soft polyurethane.4D

BR2P Nylon arm-rests, upper pad in soft polyurethane.

Height adjustable with 100 mm stroke, width adjustable  
through a handle, 30 mm stroke on each side.2D



## C40 + ATTP


Origin -Provenienza : C.E.E.

### BASE

5-star base in nylon (fibreglass reinforced), Ø 700 mm.  
OPTIONAL : 5-star base in brushed aluminium (with chromiumplated effect) Ø 700 mm.

### CASTORS

Polypropylene self-braking double castors, complying with EN1335-2 standard, preventing any accidental movement of the chair, Ø 65 mm.  
OPTIONAL I: black soft castors with grey rubber

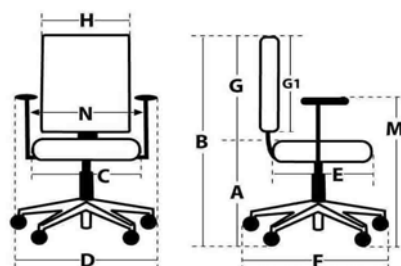

### DIMENSIONS - INGOMBRI

A	Seat height	Mini	420 mm
		Maxi	550 mm
B	Total height	Mini	1215 mm
		Maxi	1345 mm
C	Seat width		485 mm
D	Max total width		680 mm
E	Seat depth		480 mm
F	Total depth		680 mm
G	Backrest height		640 mm
G1	Backrest lumbar height adjustment		80 mm
H	Backrest width		480 mm
	Seat depth adjustment		50 mm
M	Arm-rest height adjustment I	Mini	605 mm
		Maxi	705 mm



### WEIGHT

Without armrests	17,00 Kg
With armrests	19,60 Kg

### VOLUME

Without armrests	0,40 m3
With armrests	0,40 m3

Packaging 1 units per box